

FIBER OPTIC TERMINAL BOX MODEL 13STB


Model 13STB fiber optic splice box (FOSB) are used to distribute, splice, and store the outdoor optical cables which enter and exit from the ends of the closure. There are two connection ways: direct connection and splitting connection. Applicable to situations such as overhead, man-well of pipeline, embedded situation etc.



Dimensions (mm)	280*200*90
Weight (Kg)	1.2 ~ 1.5
Number of inlet / outlet ports	Max. 4
Cable entries diameter	Φ5mm - Φ20mm
Splice capacity	12 ~ 96 fibers (Ribbon up to 144 fibers)
Operating Temperature (°C)	-40°C ~ +65°C
Humidity	93% at 40°C
Air Pressure	62kPa - 101kPa
Protection grade	IP68
Installation method	Aerial or wall-mounting

Main Components			
Component	Quantity	Usage	Remarks
Cover	1 Unit	Protecting the fiber cable splices in whole	Internal diameter of 205*146 (mm)
Bottom	1 Unit	Fixing reinforced core	Internal diameter of 205*146 (mm)
Splice Tray	Max. 4 Units	Fixing heat shrink protection sleeves	Suitable for 6, 12 and 24 cores
Integrated Seal Fitting	1 Unit	Sealing between the cover and the bottom	N/A
Port Plug	2 Units	Sealing empty ports	N/A
Earthing Deriving	1 Unit	Deriving metallic components of fiber cable	Configuration as per requirement

Accessories

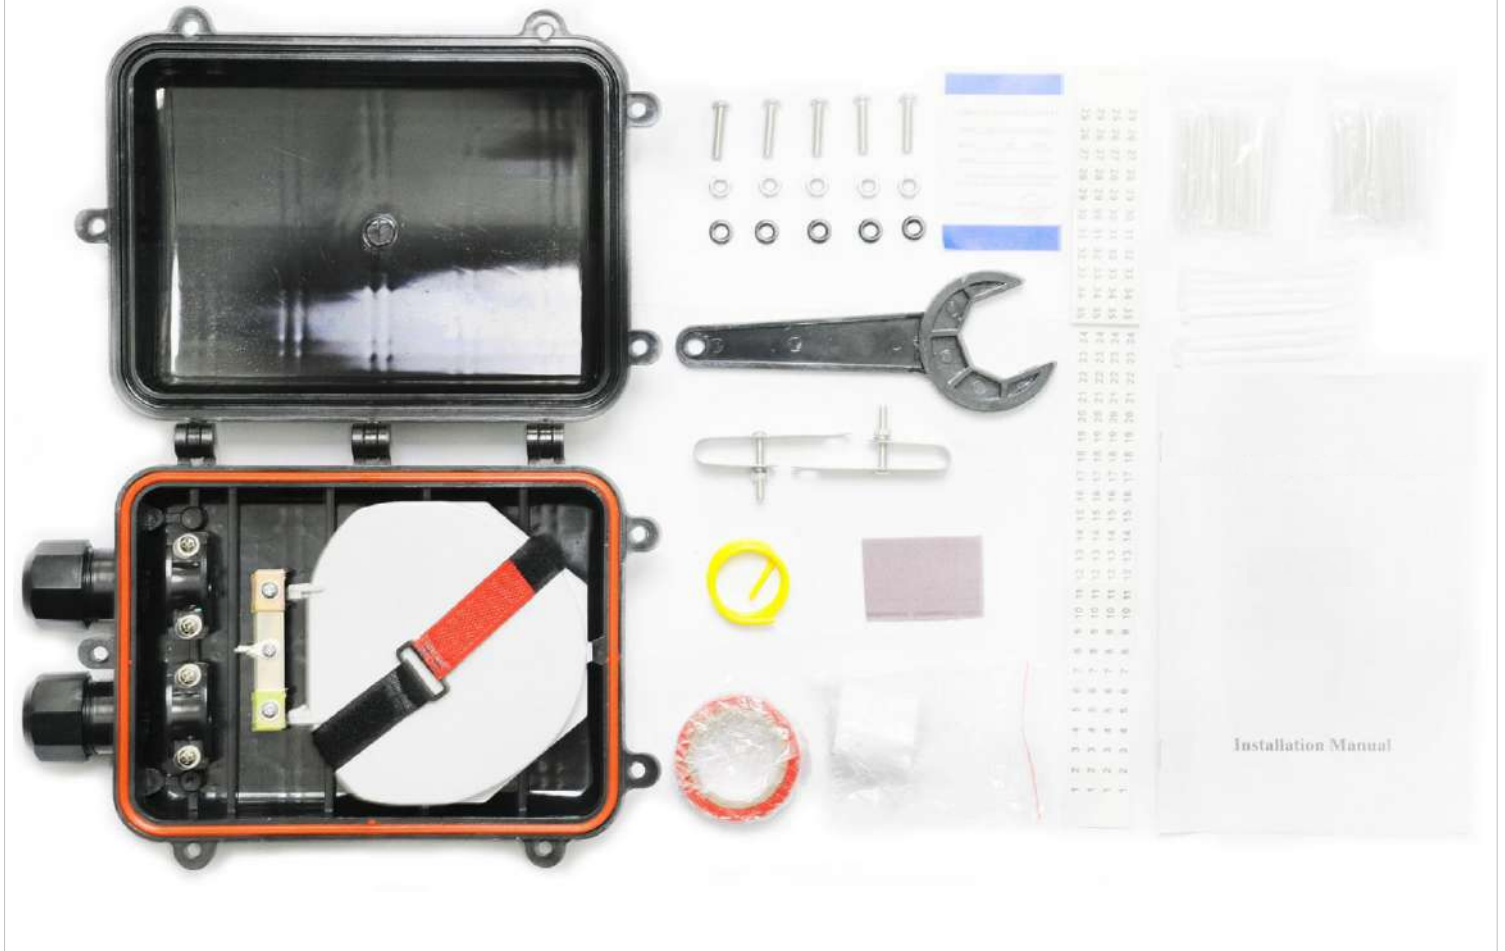

ORDERING INFORMATION

Type	Length (m)
13STB	12
	24
	36
	48
	60
	72
	84
	96

ORDERING INFORMATION EXAMPLE

13STB	96
--------------	-----------

