


FIBER OPTIC TERMINAL BOX MODEL 15STB

The equipment is widely used as a termination point for the feeder cable to connect with drop cable. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the ftx network building. Can be used indoor or outdoor .

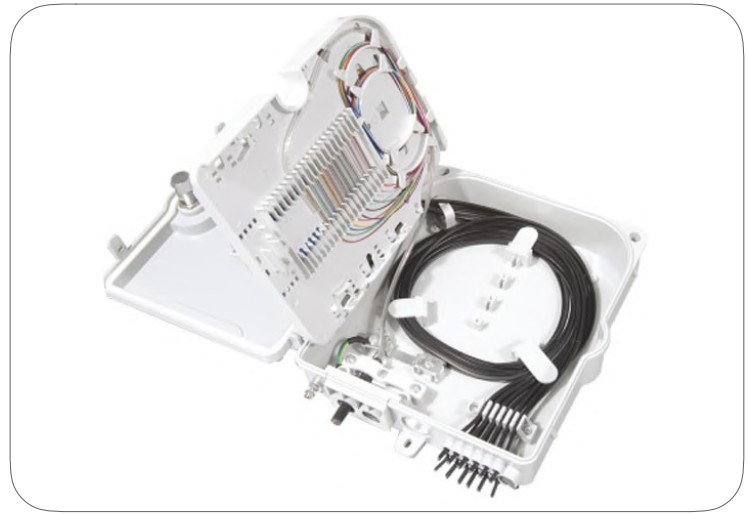

Dimensions (mm)	225*200*65
Material	PC + ABS
Weight (Kg)	1.2 ~ 1.5
Number of inlet / outlet ports	12 Drop Cable exit + 2 Cable entries
Splice capacity	12 fibers
Operating Temperature (°C)	-40°C ~ +85°C
Humidity	85% at 30°C
Air Pressure	70kPa - 106kPa
Protection grade	IP65
Installation method	Aerial or wall-mounting

ORDERING INFORMATION

Type	Length (m)
15STB	12
ORDERING INFORMATION EXAMPLE	
15STB	12