

FIBER OPTIC TERMINAL BOX MODEL 16STB

- Available for small capacity communication system, wall mounting, compact structure and harmonised.
- The cabinet is composed of two parts, one links with optical cables for fusion.
- Connection between optical cable and fiber pigtail and another links with patch cord.
- Provide fusion and storage for optical cables.
- Reliable protection appliance of fixing, stripping and earthing for optical cables.



Connector Attenuator	≤ 0.2dB
Return Loss	APC ≥60dB, UPC ≥50dB, PC ≥40dB
Material	Cold Rolled Steel SPCC (Electrostatic Spraying)
Thickness	1.5mm
High Voltage	3000V (DC) /1min, no breakdown, no arc
Insulation Resistance	≥1000MΩ/500V (DC)
Grounding wire cross-sectional area	>6mm ²
Working Temperature	-40 ~ 70°C
Humidity	90% at 30°C
Air Pressure	62kPa - 106kPa
Protection grade	IP65
Service Life	10 Years
Warranty	2 Years
Installation Method	Wall Mounted


Part Number	Dimensions (mm)	Nr. of ports
16STB48	455(H)* 405(W)* 120(D)	48 SC Simplex
16STB64	455(H)* 405(W)* 150(D)	64 SC Simplex
16STB72	455(H)* 405(W)* 150(D)	72 SC Simplex
16STB96	455(H)* 405(W)* 160(D)	96 SC Simplex
16STB144	650(H)* 500(W)* 160(D)	144 SC Simplex

Picture




Drawing

64 & 72 Adapters

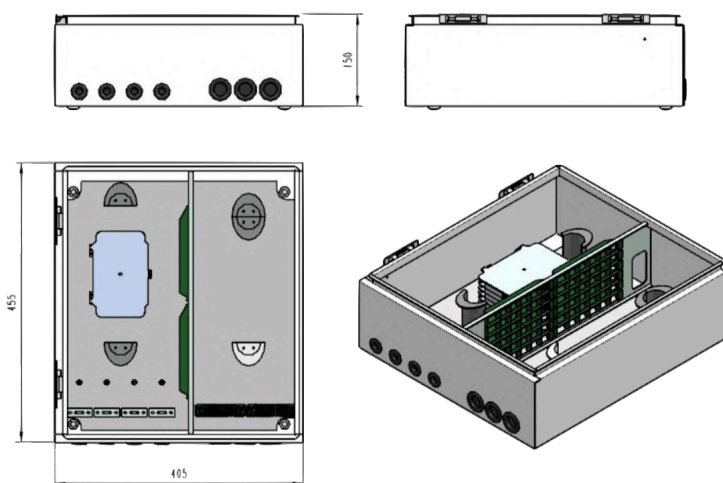

96 Adapters

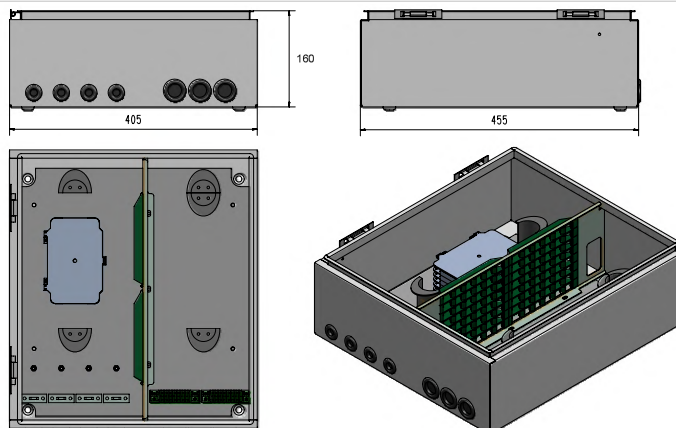

144 Adapters

