


FIBER OPTIC TERMINAL BOX MODEL 2STB

Our terminal box Model 2STB was made for FTTH projects.
 Excellent sealing performance, reusable.
 Protection grade is IP65.
 Max capacity cores of 12 SC Simplex.

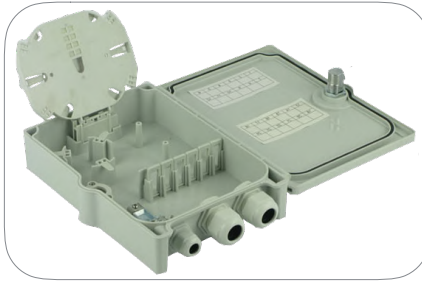

Dimensions (mm)	258.5*186*61
Material	ABS
Weight (kg)	0.8 ~ 1.0
Operating Temperature (°C)	-25°C ~ +45°C
Protection grade	IP65
Packing	1 box of 57*41.5*35.5cm : 20 units
Standard	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754

ORDERING INFORMATION											
Type	Adapter	Polishing		Type	Colors		Ports	Fiber		Length (m)	
2STB	FC	A	APC	D	Duplex	1	Aqua	1	OS1	G.652B	1
	E2000	U	UPC	Q	Quad	2	Blue	2	OS2	G.652D	2
	LC			S	Simplex	3	Beige	3	655	G.655	3
	MU					4	Green	4	657	G.657	
	SC					5	12 colors	OM1	62.5/125	
	ST					6	Yellow	22	OM2	50/125	
								23	OM3	50/125	
								24	OM4	50/125	

ORDERING INFORMATION EXAMPLE										
2STB	LC	U		D		6		6	OS2	1

Configuration: Outdoor terminal box Model 2STB LC UPC DX 12 Yellow OS2 1mt pigtails