

TERMINAL BOX MODEL 32STB

Description

The equipment is used as a termination point for the feeder cable to connect with drop cable in FTTx communication network system. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the FTTx network building.

Features

- Total enclosed structure.
- Material: PC+ABS, wet-proof, water-proof, dust-proof, anti-aging, protection level up to IP65.
- Clamping for feeder cable and drop cable, fiber splicing, fixation, storage, distribution all in one.
- Cable, pigtails, and patch cords are running through their own paths without disturbing each other, micro type PLC splitter installation, easy maintenance.
- Distribution panel can be flipped up, feeder cable can be placed by expression port, easy for maintenance and installation.
- Box can be installed by the way of wall-mounted or poled-mounted, suitable for both indoor and outdoor use.


Thunder-proof technical

- The insulation resistance between the grounding device and the metal parts of the box is no less than $2 \times 10^4 \text{ M}\Omega/500\text{V(DC)}$; $I_R \geq 2 \times 10^4 \text{ M}\Omega/500\text{V}$.
- The voltage resistance between the grounding device, and the box and its metal parts is no less than 3000V(DC)/min , no puncture, no flashover; $U \geq 3000\text{V}$.



Material	PC+ABS UV Resistant
Dimensions (mm)	208(A)* 240(B)* 117(C)
IP Rating	65
Max. Capacity	16 ports SC APC
Input cable diameter	Max. 18mm
Color	Grey, Black
Aplication	Wall mounted Pole mounted
Operating Temperature (°C)	-40°C ~ +85°C
Relative humidity	≤85%(+30°C)
Atmospheric pressure	70KPa ~ 106Kpa
Compatibility	Huawei / Corning

Drawing

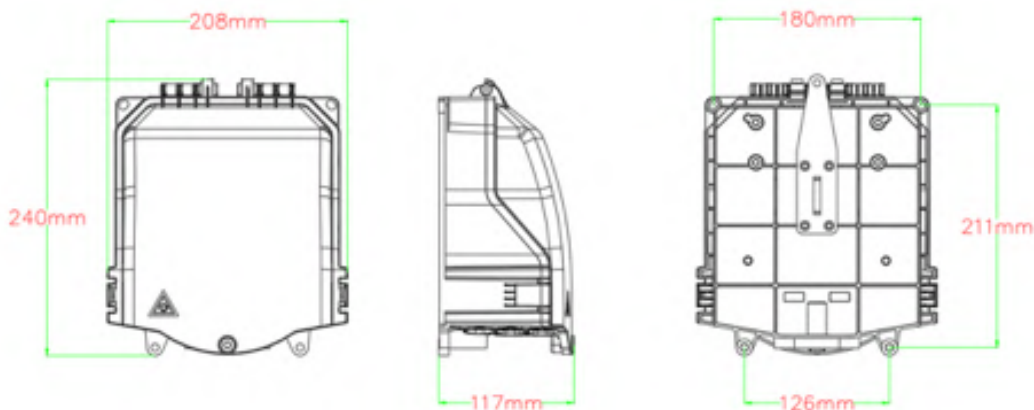

Pictures

