

### TERMINAL BOX MODEL 34STB

This box is used as a termination point for the feeder cable to connect with drop cable in FTTx communication network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one unit. Meanwhile, it provides solid protection and management for the FTTx network building.


#### Features

- Water-proof design with IP65 Protection level.
- Integrated with splice trays and two-steps splitter cassettes.
- Maximum 16 fiber splice capacity.
- Easy for maintenance and expansion, neat cabling.
- Wall-mounted Installation.
- Pole-mounted Installation.



<b>Material</b>	PC+ABS UV Resistant
<b>Dimensions (mm)</b>	287.6(H)* 172.2(W)* 103(D)
<b>IP Rating</b>	65
<b>Adapter quantity</b>	16 SC SX (UPC/APC)
<b>Outlet</b>	16 drop ports
<b>Inlet</b>	1 uncut cable port + 2 cable glands
<b>Inlet cable size (mm)</b>	8 ~ 13
<b>Density</b>	1.18g/cm <sup>3</sup>
<b>Shrinkage tare</b>	0.50% ~ 0.70%
<b>Tensile modulus</b>	2700Mpa
<b>Flame retardant</b>	UL94-V1 or more
<b>Metal parts</b>	Passed 48 hours salt spray test
<b>Color</b>	Grey/Black
<b>Aplication</b>	Wall mounted Pole mounted
<b>Operating Temperature (°C)</b>	-40°C ~ +85°C
<b>Relative humidity</b>	25% ~ 75% (+30°C)
<b>Tension</b>	500N/1min
<b>Wafering</b>	200N/100mm
<b>Bending</b>	150N/±45° /3 cycles
<b>Torsion</b>	50N±90° /3 cycles
<b>Voltage withstanding stress</b>	3kV/1min/10mA

### Drawing

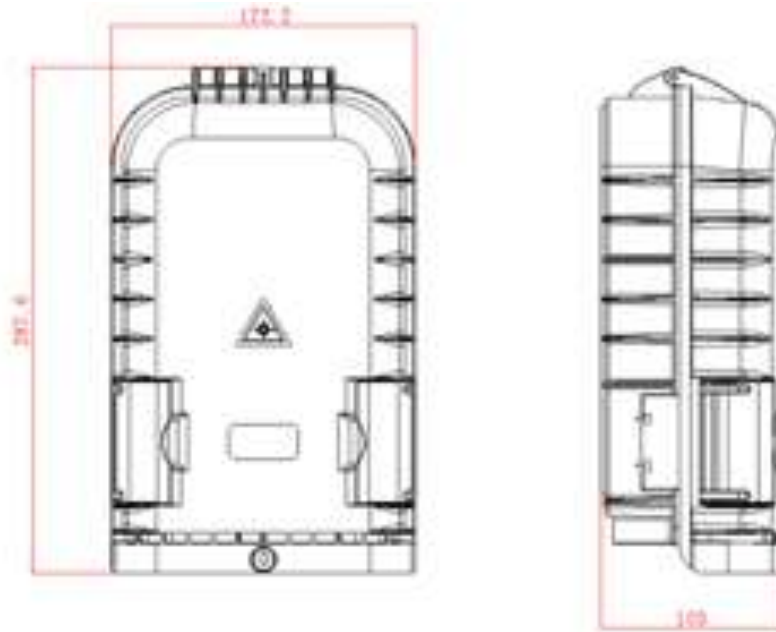

**34STB-PG**



**34STB-SP**

### Model