
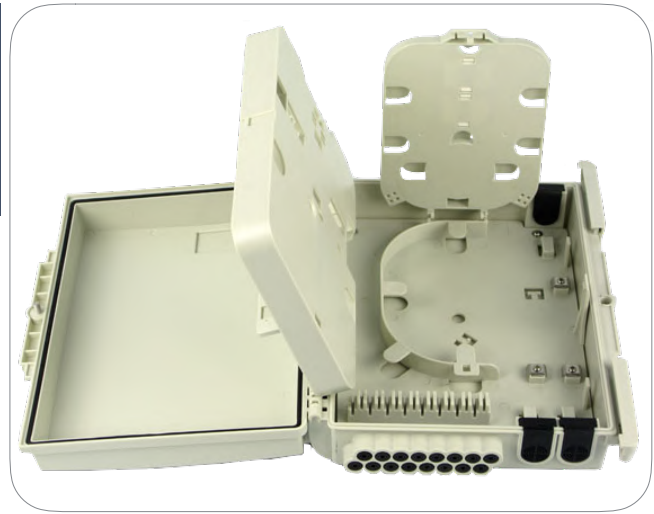


FIBER OPTIC TERMINAL BOX MODEL 3STB

Our terminal box Model 3STB was made for FTTH projects.
 Excellent sealing performance, reusable.
 Protection grade is IP65.
 Max capacity cores of 16 SC Simplex.

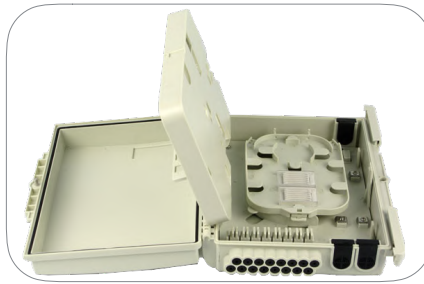

Dimensions (mm)	295*250*100
Material	Polymer Synthetic Plastic
Weight (kg)	2.0 ~ 2.4
Operating Temperature (°C)	-25°C ~ +45°C
Protection grade	IP65
Packing	1 box of 63*58*52cm : 12 units
Standard	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754

ORDERING INFORMATION											
Type	Adapter	Polishing		Type	Colors		Ports	Fiber		Length (m)	
3STB	FC	A	APC	D	Duplex	1	Aqua	1	OS1	G.652B	1
	E2000	U	UPC	Q	Quad	2	Blue	2	OS2	G.652D	2
	LC			S	Simplex	3	Beige	3	655	G.655	3
	MU					4	Green	4	657	G.657	
	SC					5	12 colors	OM1	62.5/125	
	ST					6	Yellow	30	OM2	50/125	
							31	OM3	50/125		
							32	OM4	50/125		

ORDERING INFORMATION EXAMPLE									
3STB	SC	A	S	6	16	OS2	1		

Configuration: Outdoor terminal box Model 3STB SC APC Simplex 16 Yellow OS2 1mt pigtails