


FIBER OPTIC TERMINAL BOX MODEL 5EUTB

Terminal Box Applicable in the straight through or branch connection of indoor cable.
Available for the distribution and terminal connection of various kinds of optical fiber system.
Max capacity cores of 4 with LC DX (4* FC/SC/ST SX).

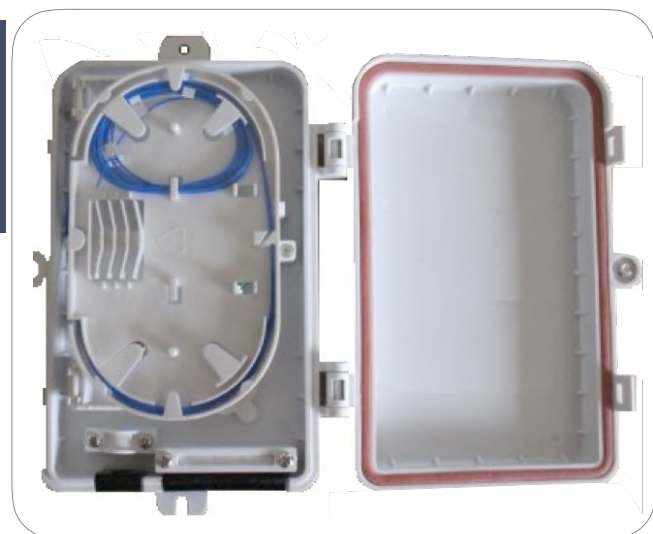

Dimensions (mm)	217*145*40
Material	ABS
Cable entries	2 entries PG13.5 - 6-12mm
Weight (kg)	0.44
Pressure Resistance	500N
Shock Resistance	750N
Operating Temperature(°C)	-40°C~+60°C
IP Rated	65
Standard	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754

ORDERING INFORMATION

Type	Adapter	Polishing		Type	Colors		Ports	Fiber		Length (m)	
5EUTB	FC	A	APC	D	Duplex	1	Aqua	1	OS1	G.652B	1
	E2000	U	UPC	Q	Quad	2	Blue	2	OS2	G.652D	2
	LC			S	Simplex	3	Beige	3	655	G.655	3
	MU					4	Green	4	657	G.657	
	SC					5	12 colors		OM1	62.5/125	
	ST								OM2	50/125	
								OM3	50/125		
								OM4	50/125		

ORDERING INFORMATION EXAMPLE

5EUTB	LC	U	D	5	6	OS2	1
-------	----	---	---	---	---	-----	---

Configuration: Indoor terminal box Model 5EUTB LC UPC DX 6 12 Colors OS2 1mts pigtailed (5EUTBLCUD56OS21)

HONG KONG

Tel. +852 3678 6747
sales@romatecsans.com

CHILE

Tel.: +56 22 2187258
ventas@romatecsans.com

SPAIN

Tel.: +34 61222 4997
eu@romatecsans.com