


FIBER OPTIC SLIDING RS4 PATCH PANEL

The RS4 fiber optic patch panel is designed and manufactured under the telecommunication standards. It is a basic, flexible, light and suitable solution for your installation. Suitable for 19" or 23" standard optic distribution cabinets.

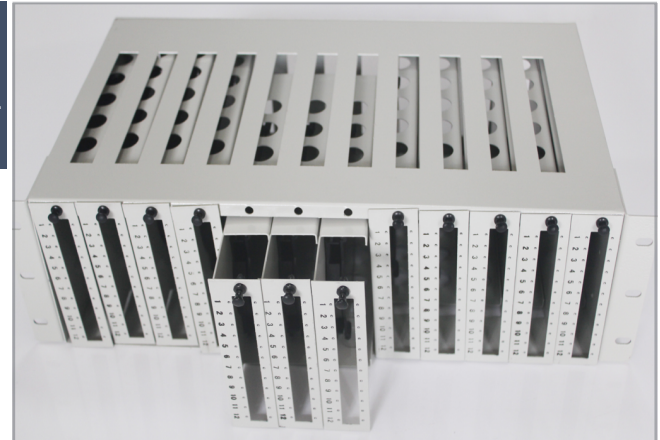

Material	Zinc-plated Cold Rolled Steel Sheet of 1.0mm
Width (mm)	482
Depth (mm)	250
High (mm)	3U
Capacity	Up to 288 fibers with LC duplex adapters (144 SC simplex)
Weight (kg)	9
Operating Temperature (°C)	-40°C ~ +55°C
Accessories	12 splice trays 12 Cassette (12 adapters SC SX) Metal front cover

ORDERING INFORMATION

Model	Adapter	Polishing	Type	Colors	Ports	Fiber	Length (m)
RS3	FC	A APC	D Duplex	1 Aqua	1	OS1 G.652B	1
	E2000	U UPC	Q Quad	2 Blue	2	OS2 G.652D	2
	LC		S Simplex	3 Beige	3	655 G.655	3
	MU			4 Green		657 G.657	
	SC			5 12 colors	7	OM1 62.5/125	
	ST				8	OM2 50/125	
						OM3 50/125	
						OM4 50/125	

ORDERING INFORMATION EXAMPLE

RS3	LC	U	D	5	6	OS2	1
-----	----	---	---	---	---	-----	---

Configuration: Fiber Optic Sliding Patch Panel LC UPC 24 DX 48 Colors OS2 1mts pigtails