


### FIBER OPTIC ENCLOSURE MODEL IMF

It applies to any sort of cables (loose tube, skeleton, ribbon) and is available for usage of various connections (distribute bridging, divergence) in multiple environments (aerial, bracket, pipe-lined, hand hole, manhole).

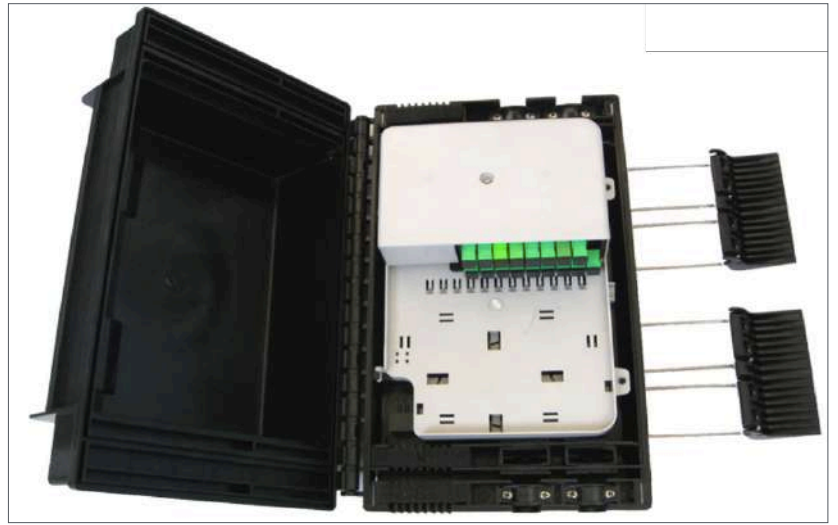

	IMF
Dimensions (mm)	210*350*110
Max. Fiber Capacity	24
Cable entries (mm)	4* max. $\Phi$ 16 / 16* max. $\Phi$ 2*3
Material	PC
Type of seal	Silicone Rubber
IP Rated	IP68
Installation Methods	Aerial, Wall
Operating Temperature (°C)	-40°C ~ +60°C
Features	Anti UV, Inflaming retarding, rainfall resistant

#### Drawing

