


FIBER OPTIC DOME ENCLOSURE MODEL MMP

IP68 Dome Enclosures are suitable to protect fiber optic cable splices in branching applications. The outer injection mould body makes it impenetrable to elements. Romatecsans Model MMP hold up to 240 splices.



Cable entries



Φ 8 ~ 17.5 cable output




Φ 10 ~ 17.5 uncut input


Protection grade	IP68
Material	Modified Polymer Plastic
Seal Material	Vulcanized Silicone Rubber
Type of seal	Heat shrink
Dimensions (mm)	478*Φ260
Weight (kg)	5.1 ~ 5.8
Operating Temperature (°C)	-40°C ~ +60°C
Packing	1 box of 740*490*450 : 6 units

Installation Methods

Pole Mounting



Aerial

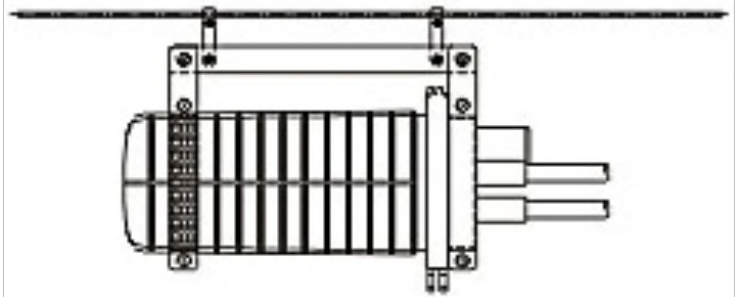

ORDERING INFORMATION

Model	Fibers
MMP	48

	240