


FIBER OPTIC DOME ENCLOSURE MODEL MMS Mech. 2

IP68 Dome Enclosures are suitable to protect fiber optic cable splices in branching applications. The outer injection moulded body makes it impenetrable to elements. Romatecsans Model MMS hold up to 144 splices.



Cable entries



Φ up to 21mm
cable output




Φ 10 ~ 18 uncut input


Protection grade	IP68
Material	Modified Polymer Plastic (Non recycling material) UL94-HB
Seal Material	Vulcanized Silicone Rubber
Dimensions (mm)	435*Φ230
Type of seal	Mechanical
Weight (kg)	3.6 ~ 4.2
Operating Temperature (°C)	-40°C ~ +60°C
Packing	1 box of 740*490*450 : 6 units
Standards	Anti UV, ASTM 123, ASTM 153 & ASTM B6

Installation Methods


Pole Mounting



Aerial

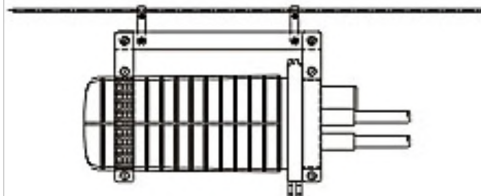

Pipe Lined



ORDERING INFORMATION

Model	Fibers
MMS Mech.2	48