


### FIBER OPTIC DOME ENCLOSURE MODEL MMS

IP68 Dome Enclosures are suitable to protect fiber optic cable splices in branching applications. The outer injection mould body makes it impenetrable to elements. Romatecsans Model MMS hold up to 144 splices.



#### Cable entries



Φ 8 ~ 17.5 cable output




Φ 10 ~ 20 uncut input


<b>Protection grade</b>	IP68
<b>Material</b>	Modified Polymer Plastic
<b>Seal Material</b>	Vulcanized Silicone Rubber
<b>Dimensions (mm)</b>	435*Φ230
<b>Type of seal</b>	Heat shrink
<b>Weight (kg)</b>	3.6 ~ 4.2
<b>Operating Temperature (°C)</b>	-40°C ~ +60°C
<b>Packing</b>	1 box of 740*490*450 : 6 units

#### Installation Methods

##### Pole Mounting



##### Aerial

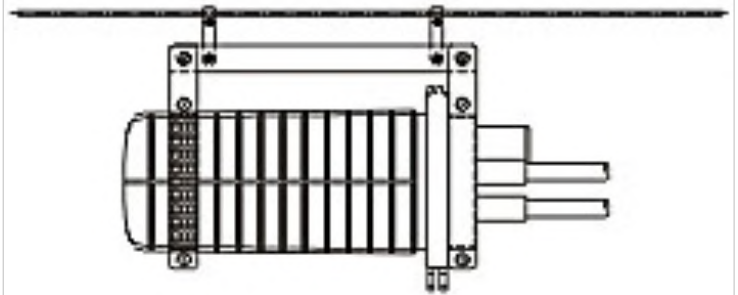

#### ORDERING INFORMATION

Model	Fibers
<b>MMS</b>	<b>48</b>
	<b>96</b>
	<b>144</b>